
Vendor stock No.:BH19-092-097-30

NOTE: The M8 bolt cover (OO), M6 bolt cover (NN), M8 plastic cap (MM) & M6 plastic cap (LL) in step 1 to 4 are only for reference. Please attach them to bolts in step 7.

### **Package Contents**

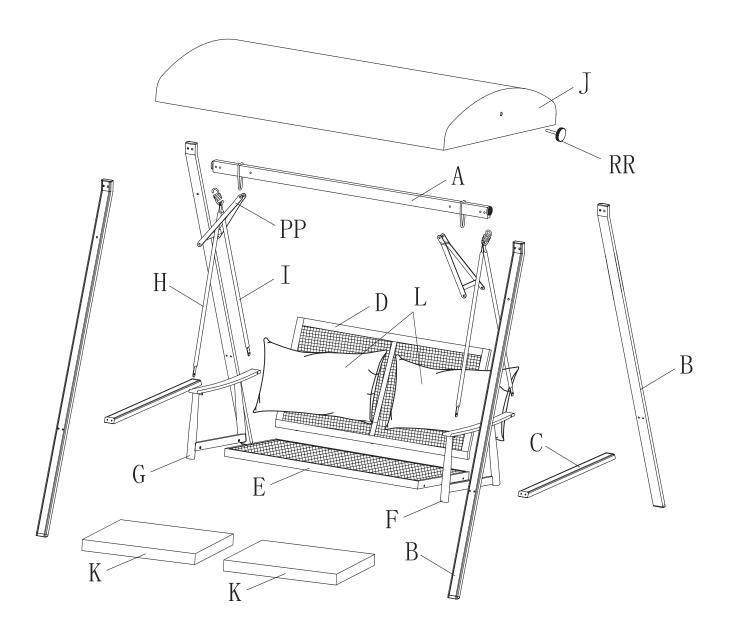

Vendor stock No.:BH19-092-097-30


NOTE: The M8 bolt cover (OO), M6 bolt cover (NN), M8 plastic cap (MM) & M6 plastic cap (LL) in step 1 to 4 are only for reference. Please attach them to bolts in step 7.

PART NO.	PICTURE	DESCRIPTION	QTY
Α		Top Bar	1
В	· · ·	Leg	4
С		Leg Connector	2
D		Back	1
Е		Seat	1
F		Left Arm	1
G		Right Arm	1
Н	QC 30	Short Hanging Bar	2
I	Œ <u>→</u> 30	Long Hanging Bar	2
J		Canopy	1
К		Seat Cushion	2
L		Pillow	2

PART NO.	PICTURE	DESCRIPTION	QTY
AA		M8*95 bolt	4+1
BB		M8*50 bolt	2+1
CC		M8*45 bolt	4+1
DD		M6*65 bolt	4+1
EE		M6*55 bolt	3+1
FF		M6*45 bolt	8+1
GG		M6*25 bolt	4+1
НН	Ð	M6 Nut	2+1
II		M8 Nut	10+1
JJ	0	M6 Washer	21+1
KK	0	M8 Washer	20+1
LL	0	M6 Plastic Cap	19+1
MM	0	M8 Plastic Cap	10+1
NN	<b>©</b>	M6 Bolt Cover	2+1
00		M8 Bolt Cover	10+1
PP		Support Rod	2
QQ		Hook	2
RR		Knob	2
SS		Allen Wrench	1
TT	D	Wrench	1

Vendor stock No.:BH19-092-097-30


NOTE: The M8 bolt cover (OO), M6 bolt cover (NN), M8 plastic cap (MM) & M6 plastic cap (LL) in step 1 to 4 are only for reference. Please attach them to bolts in step 7.

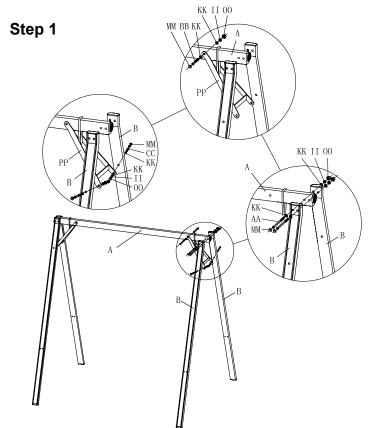

#### Step 1:

- Attach the leg (B) to the top bar (A) with M8x95 bolt (AA), M8 washer (KK) and M8 nut (II).
- Attach the support rod (PP) to the top bar (A) with M8x50 bolt (BB), M8 washer (KK) and M8 nut (II).
- Attach the support rod (PP) to the leg (B) with M8x45 bolt (CC), M8 washer (KK) and M8 nut (II).
- Don't completely tighten.

Step 2

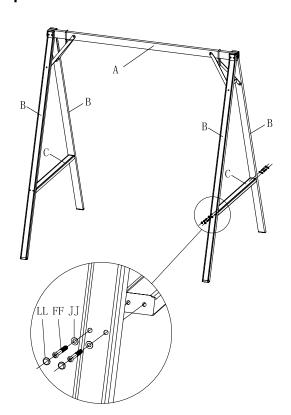

#### Step 2:


- Insert the leg connector (C) between the legs (B), attach with M6x45 bolt (FF) & M6 washer (JJ).
- Completely tighten all bolts in step 1 & 2.

Questions, problems, missing parts? Before returning to your retailer, call our customer service department at (866) 905 - 4107, 8:30 a.m. - 5:00 p.m. PST/11:30 a.m. - 8:00 p.m., EST, Monday - Friday.

Vendor stock No.:BH19-092-097-30

NOTE: The M8 bolt cover (OO), M6 bolt cover (NN), M8 plastic cap (MM) & M6 plastic cap (LL) in step 1 to 4 are only for reference. Please attach them to bolts in step 7.


### Step 3

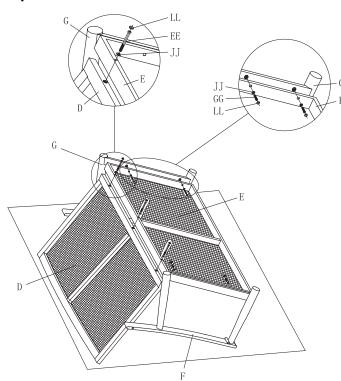

#### Step 3:

- Attach the back (D) to the seat (E) with M6x55 bolt (EE) & M6 washer (JJ).
- Attach the left arm (F) to the seat (E) with M6x25 bolt (GG) & M6 washer (JJ).
- Repeat to attach the right arm (G).
- Don't completely tighten.



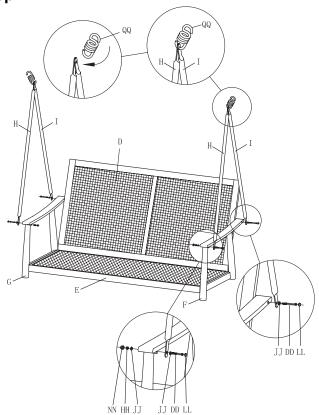

#### Step 4

- Attach the short hanging and long hanging bars (H & I) to the arms (F & G) with M6x65 bolt (DD) & M6 washer (JJ).
- Completely tighten all bolts in step 3 & 4.
- Loop the hook (QQ) through the holes on the hanging bars (H & I).

Questions, problems, missing parts? Before returning to your retailer, call our customer service department at (866) 905 - 4107, 8:30 a.m. - 5:00 p.m. PST/11:30 a.m. - 8:00 p.m., EST, Monday - Friday.

Vendor stock No.:BH19-092-097-30


NOTE: The M8 bolt cover (OO), M6 bolt cover (NN), M8 plastic cap (MM) & M6 plastic cap (LL) in step 1 to 4 are only for reference. Please attach them to bolts in step 7.

### Step 5



#### Step 5:

- Hook the fully assembled swing to the top bar (A).
- Tighten all bolts (AA, BB, CC, DD, EE, FF, GG) with the Allen wrench (SS) and all nuts with the wrench (TT).
- Ensure all connections are secure.

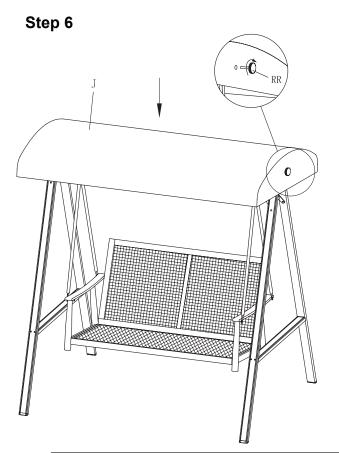

#### Step 6:


- Attach the canopy (J) to the top bar (A).
- Insert the knob (RR), turning the knob (RR) clockwise tightly.

Questions, problems, missing parts? Before returning to your retailer, call our customer service department at (866) 905 - 4107, 8:30 a.m. - 5:00 p.m. PST/11:30 a.m. - 8:00 p.m., EST, Monday - Friday.

Vendor stock No.:BH19-092-097-30

NOTE: The M8 bolt cover (OO), M6 bolt cover (NN), M8 plastic cap (MM) & M6 plastic cap (LL) in step 1 to 4 are only for reference. Please attach them to bolts in step 7.

Step 7

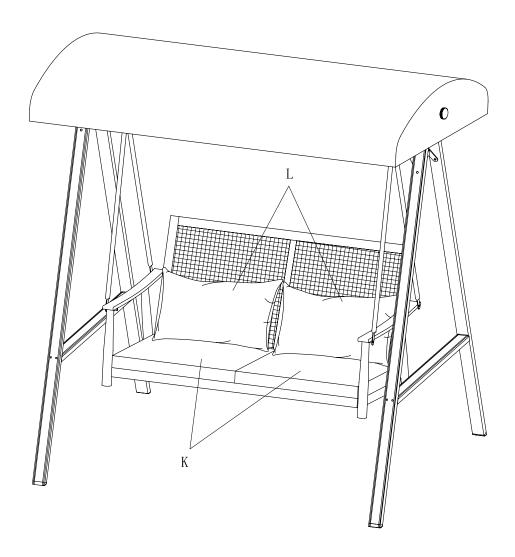

Step 7:

- Attach the M8 bolt cover (OO), M6 bolt cover (NN), M8 plastic cap (MM) & M6 plastic cap (LL) to all bolts as shown in previous steps 1 to 4.
- Place the seat cushions (K) and pillows (L) on the swing.
- Your swing is now ready to use.